



## VERMITEX '7' FS

### Product Specification

VermiteX '7' FS is a mixture of Vermiculite and Cement, plus additives to improve its rheological properties and can be applied to a variety of backgrounds. VermiteX '7' FS does not spall or crack under mechanical impact and is resistant to thermal shock.

Application can be carried out by hand or preferably mechanically. Being a premix material, on site, only water need be added and we do recommend the use of Mechanical mixers.


When using VermiteX '7' FS in exposed locations - a water repellent protective film should be used, and adopt water shedding details on junctions and abutments.

VermiteX '7' FS may be reinforced with light gauge galvanised mesh.

### Typical Properties

- Lightweight, Durable Material
- Factory premixed product - Add water on site
- Spray applied for monolithic joint free coating
- Suitable for exposed use



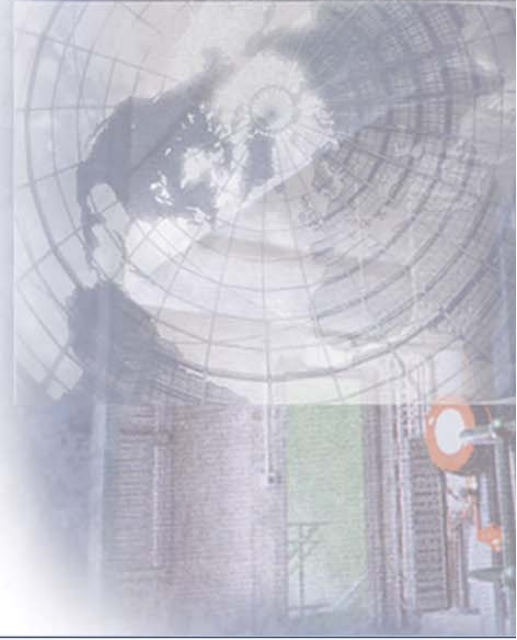

## VERMITEX '7' FS

### Product Data

- Description: Cementitious based
- Finish: Monolithic, screeded & trowelled
- Colour: Grey to Off White
- Packaging: 50 Lt. bag
- Typical Substrates: Concrete
- Application: Poured/Spray
- Coats: One or as required
- Cure: Hydraulic set
- Cure Time: Dependent on conditions
- Initial Set: 4 to 6 hours

### Storage

VermiteX '7' FS bags must be kept dry until ready for use. Materials should be stored off the ground, under cover, and away from wet or damp surfaces or areas of very high humidity. The shelf life of the product is generally 6-12 months. However, the use of the "FIFO Rule" shall apply, that is; 'first in - first out' to determine the correct rotation of the materials.

### Health Statement

VermiteX '7' FS contains no asbestos and presents no known health hazard before, during or after its application. The normal precautions relevant to the handling of cement based products apply, for example; dust mask, eye protection or the covering of sensitive skin.

For more information on VermiteX '7' FS and other products in our range, please contact:

L & A Fazzini Manufacturing Pty Ltd  
23-25 Wentworth Street  
Greenacre NSW 2190

**FOR AUSTRALIAN CUSTOMERS  
FREECALL: 1800 629 305**

**TEL: (61-2) 9642 4745 or via FAX: (61-2) 9742 5164**